

**GUIDE**

V1.02

Wuhan Guide Technology Co.,Ttd.



|            |             |    |
|------------|-------------|----|
|            | .....       | 1  |
| 1.1 USB    | HF500 ..... | 1  |
| 1.2        | .....       | 3  |
|            | .....       | 5  |
| 2.1        | .....       | 5  |
| 2.2        | .....       | 5  |
| 2.3        | .....       | 5  |
|            | .....       | 6  |
| 3.1        | .....       | 7  |
| 3.2        | .....       | 8  |
| 3.3        | .....       | 8  |
| 3.4        | .....       | 9  |
| /          | .....       | 10 |
|            | .....       | 10 |
| / /        | .....       | 11 |
| 6.1        | .....       | 12 |
| 6.2        | .....       | 12 |
| 6.3        | .....       | 13 |
| 6.4        | .....       | 13 |
|            | .....       | 13 |
|            | .....       | 14 |
| 8.1        | .....       | 15 |
| 8.2        | .....       | 15 |
|            | .....       | 18 |
|            | .....       | 19 |
|            | .....       | 20 |
| BootLoader | .....       | 20 |



---





### 1.2

- 1 232 USB
- 2 WIFI
- 1 232 USB
- D 232 USB




RJ45



D

|   |   |    |
|---|---|----|
|   |   |    |
| 3 | 2 | RX |

|   |   |     |
|---|---|-----|
| 4 | 3 | TX  |
| 1 | 1 | V+  |
| 2 | 5 | GND |

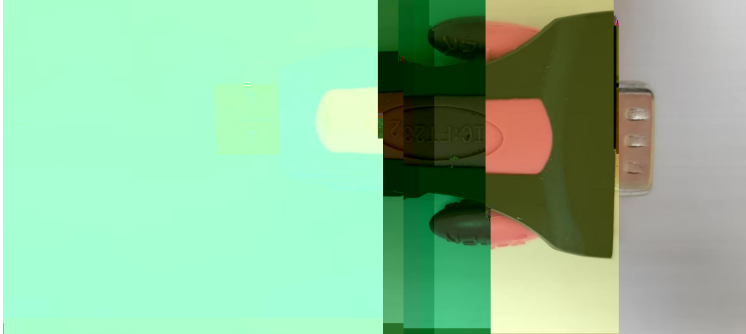

232 USB

2 WIFI

WIFI

RJ45

USR-VCOM

“ 1.1 USB

”

WIFI



WIFI



TCP Client

IP

10.10.100.254

8899

---

---

Select Database File

Select Language



### 3.1



“ ”



“ ”



COM



COM





端口: COM1 初始化功率: [19] 250kW


### 3.2



AFE

108.15/108.16

### 3.3

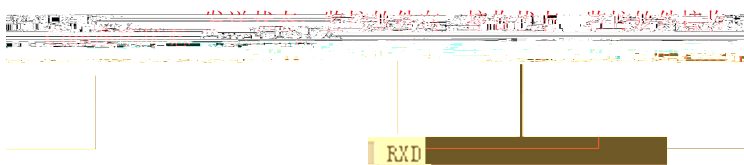

---

2



/

J3



COM


PORT

COM

(COM

->

)



“ ”

“ ”

TXD

“ ”

PORT TXD RXD




Com



ModBus

1

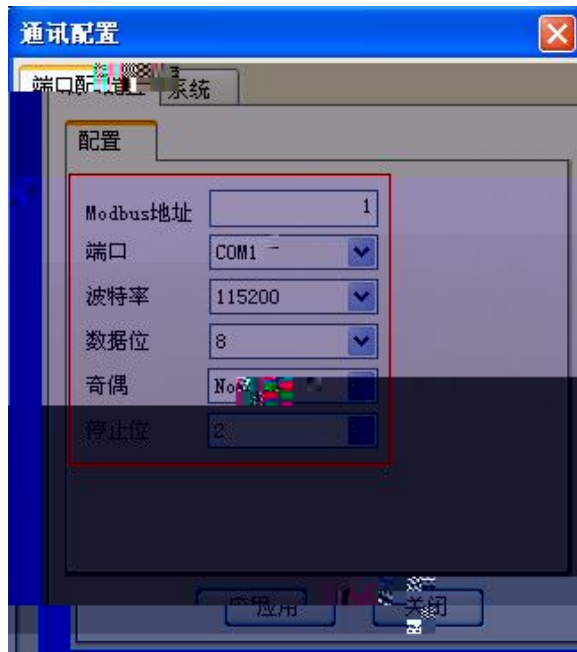

“ ”

/ /



“ ” “ ”

## 6.1

☐ 所有参数      ☒ 参数组

” “ ”



“ ”



“ ”



xls



x m l



xm l


### 参数对比

“ ” “ ”

## 6.2

“ ”

P16

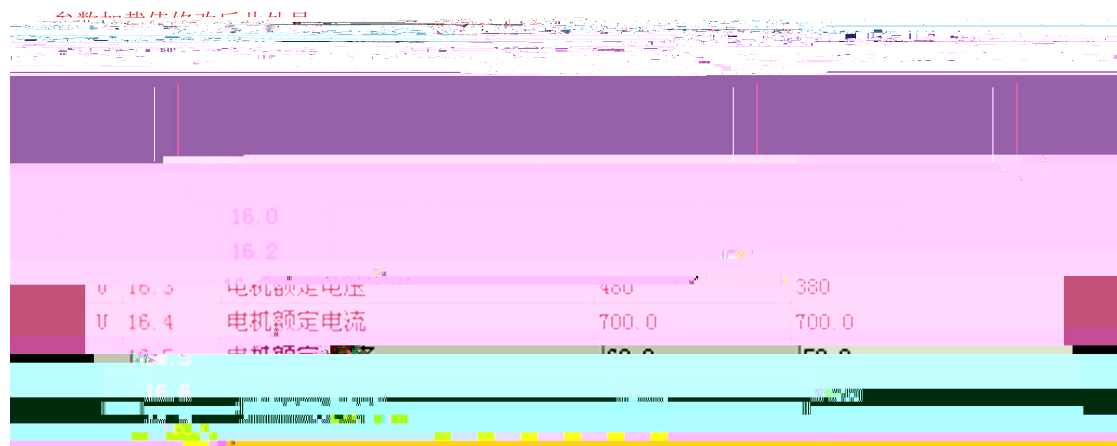

FLASH




FLASH

FLASH


“ ”

---

## 6.3




xls




(P0 )

“ ”

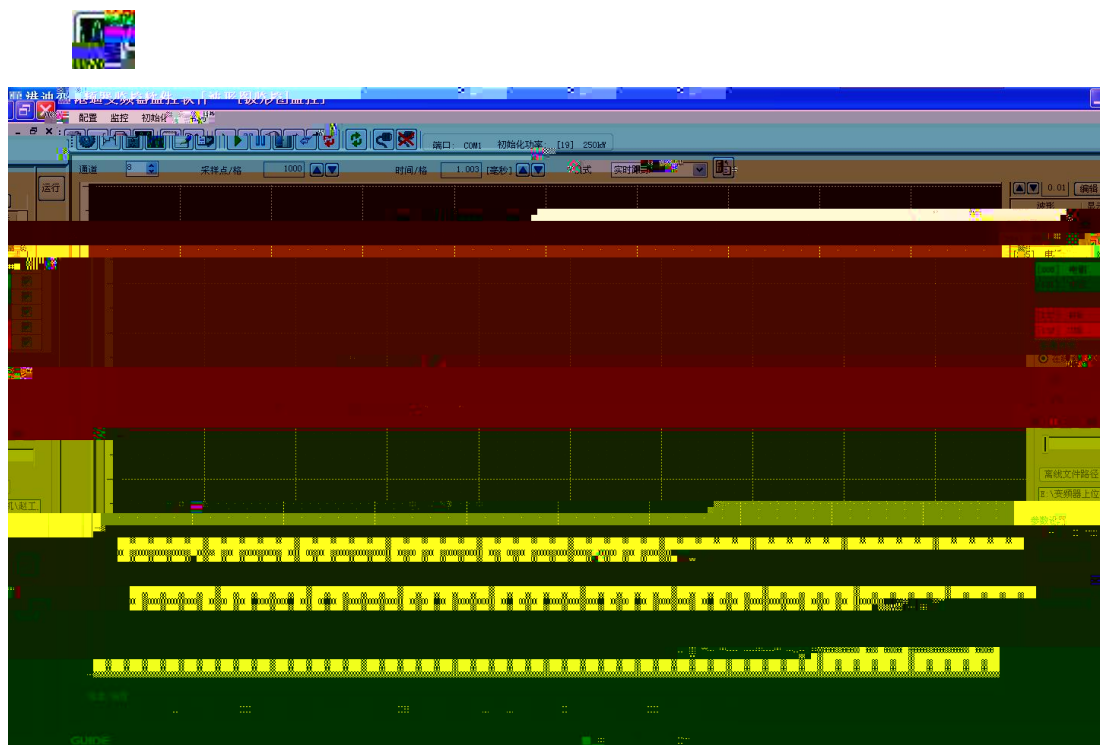

## 8.1

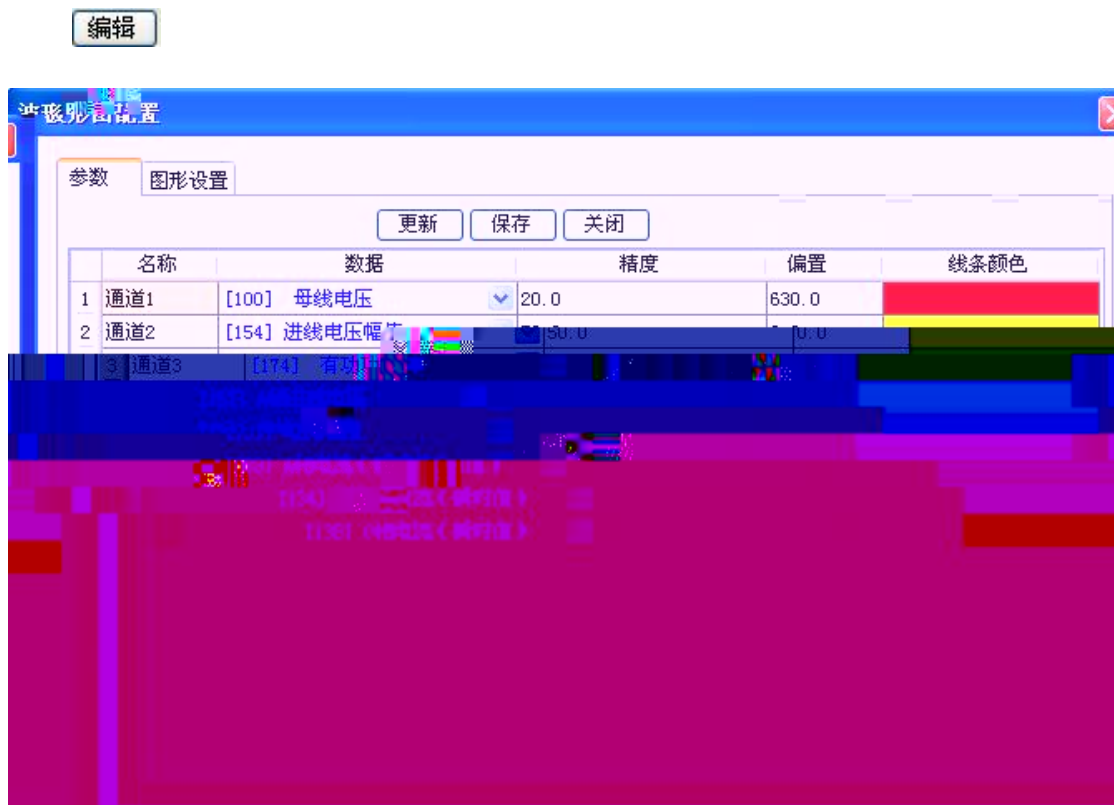


8




49

## 8.2

1

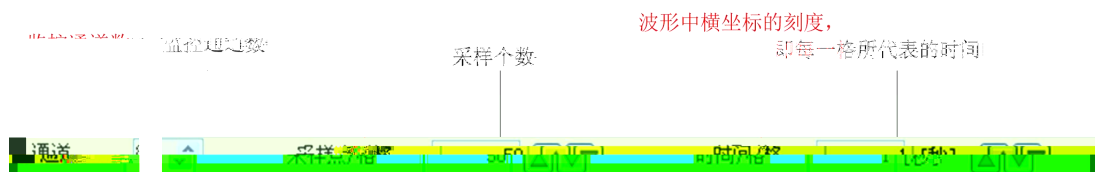

波形图/线条图 单击在波形图中

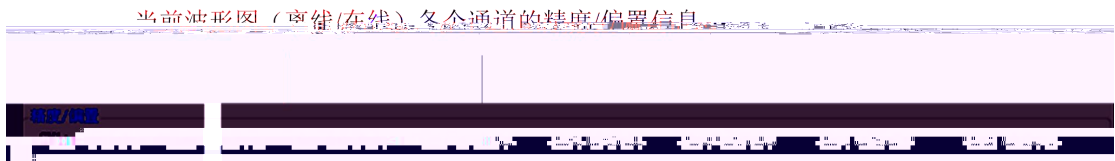

“ ” / 100 / 1 /  
“ ” / “ ”

|     |     |    |    |
|-----|-----|----|----|
| ▲ ▼ | 0.5 | 编辑 | 精度 |
|     |     |    | 20 |

$$0.5 \times 20 = 10$$

2



A. “ ”

B. “ ”

\$\GuideInvSoft\OffLineData\WaveTrace

“ COM \_ \_ \_onOffLine.data ”

100M

C. “ ” “ ”



3

运行

停止

4

A.

B.

D

C.

D.

“ ”

“ / ”

“ ”



显示错误的 故障编号: 0 为 数据从变频器 数据从离线 加载本地 点击此处查看帮助

清除故障 保存当前的 保存所有故障信息

故障总数 17

在线 离线 加载离线文件

|        |           |     |      |
|--------|-----------|-----|------|
| 105.2  | 输出180V    | 5.2 | 控制方法 |
| 105.10 | 给定频率 [Hz] | 5.2 | 控制方法 |
| 105.11 | 速度 [Hz]   | 5.2 | 控制方法 |
| 105.24 | 数字量输入     |     |      |
| 105.25 | 数字量输出     |     |      |


安装故障信息




跟踪

错误发生前

错误发生时

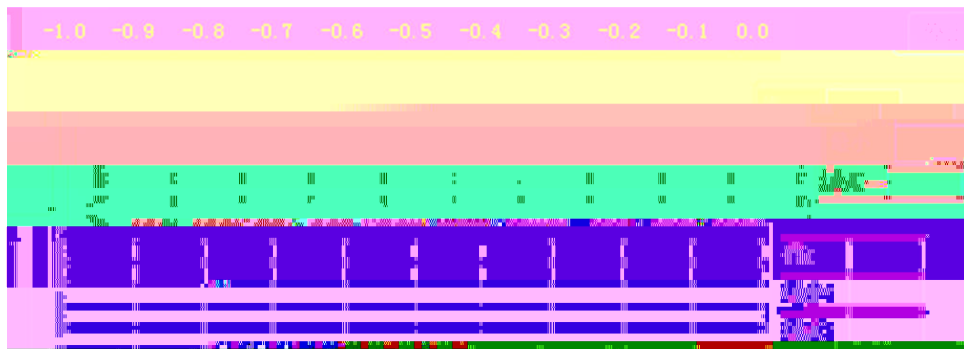

0.0 -1.0 0.0

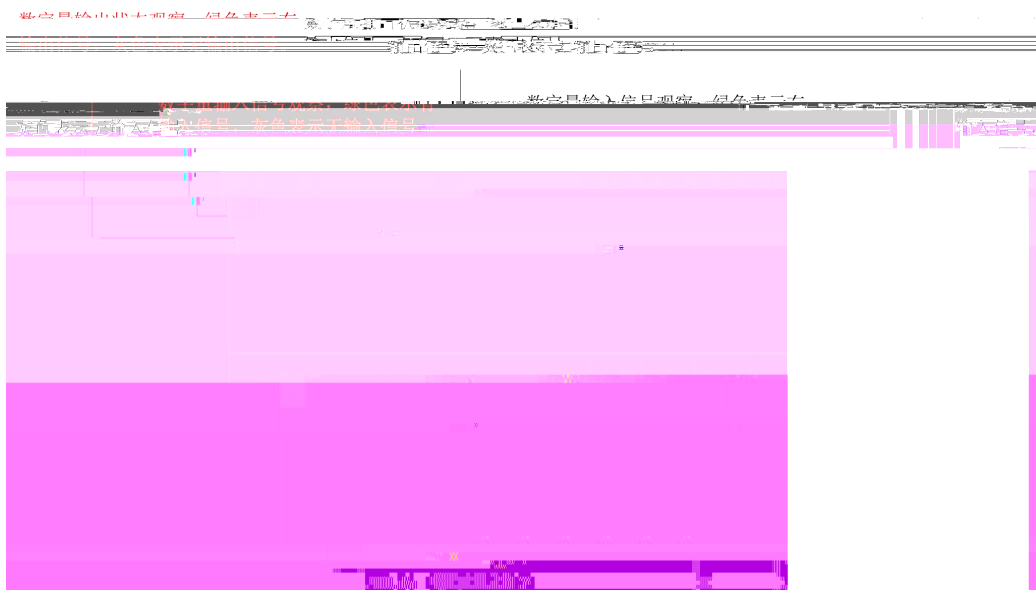

---

1



---

DSP

BootLoader

DSP

flash



232